
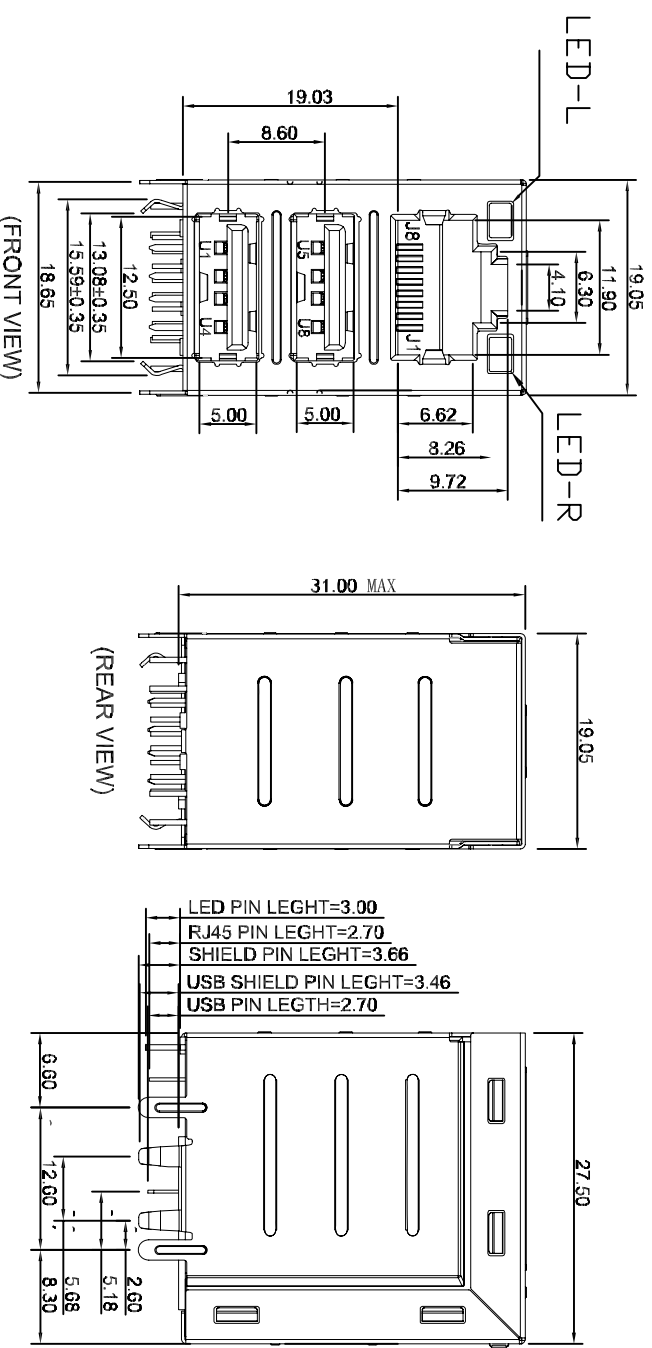


CATEGORY	DESCRIPTION	P/N #	REV.	ECN NO	DESCRIPTION	REVISED	DATE
CONNECTOR	RJ45 889C +(2)USB 2.0 Connector with LED	MU886-BX31-CRLDX1	A01		New Release	KELLY	2017.04.06



- NOTE:**
- MATERIAL:**
Housing: High temp. Thermo plastics, UL94V-0.
Contact: Copper Alloy.
Shell: Steel or Spcc.
 - Electrical performance:**
Voltage Current Rating: 1.5 AMP, 30V AC
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 40 m Ω Max.
Dielectric Withstanding Voltage: 500V AC
 - Temperature Range:** -45 $^{\circ}$ C to +85 $^{\circ}$ C
 - FINISH:**
Contact: Tin Plating 100u" on solder tail area.
RJ45 Gold plating Flash on contact area.
USB Gold plating Flash on contact area.
30u" min Ni underplating over all.

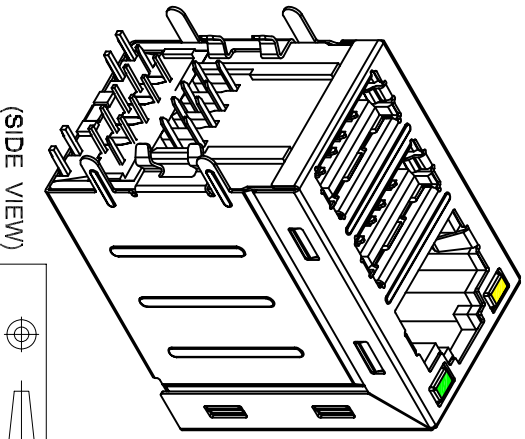
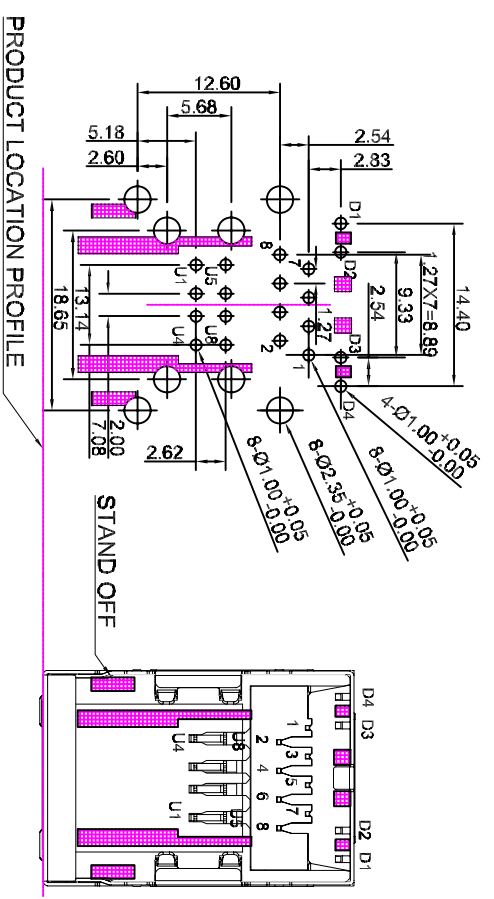


Table 1

X	Terminal Plating
0	G/F Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

Table 2

X	LED-L	LED-R
1	GREEN	YELLOW
2	YELLOW	GREEN
A	GREEN/ORANGE	GREEN
B	YELLOW	GREEN/ORANGE
C	RED	YELLOW/GREEN

Part No.: MU886-BX31-CRLX01

东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

UNITS: mm [inch]	SCALE: 1/1	DWG. NO.:
TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	SIZE: A3 PAGE: 1 OF 1 REV: A01	
APPROVED BY	CHECKED BY	PREPARED BY
TNOY	BILL	KELLY
CUSTOMER COPY		